


CEMENT TYPE RESISTOR 水泥型固定電阻器

SQ

- PACKING 包裝：BULK PACKING 散裝
- PRODUCT TYPE 產品型號：SQP TYPE,SQM TYPE
- TOLERANCE 誤差：±5% ，±10%
- RESISTANCE VALUE RANGE 阻值範圍:0.1 OHM - 150K OHM
- TESTING STANDARD 測試標準：JISC 5202

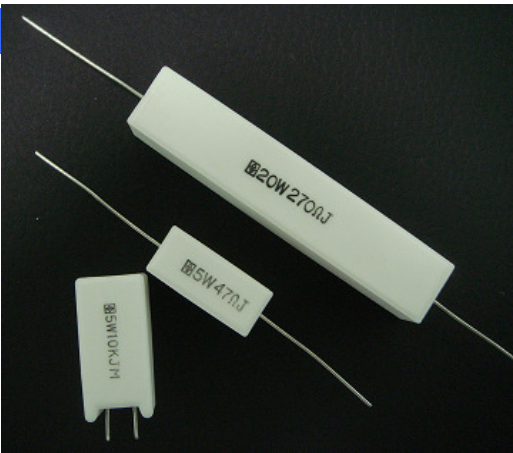


*NON-INDUCTIVE TYPE ALSO AVAILABLE. 無感性亦可供應

WIREWOUND RODS,VALUE CUT RODS OR FIBRE GLASS RODS TO BE USED.

採用繞線瓷棒，切槽瓷棒或玻璃纖維瓷棒。


SQP型（軸式導線型）

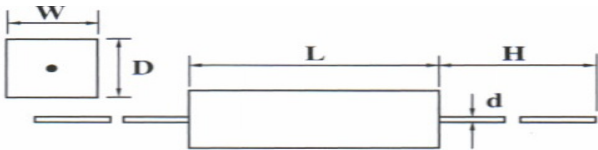

Unit:mm

Style 型號	Power rating at 70℃ 額定功率	BODY			LEAD WIRE		Resistance range	Power Film
		W±1	L±1	D±1	H	d±0.05	阻值範圍	
SQP 1W	1W	6	14	6	25±2	0.60	0.1Ω～20Ω	20Ω～25KΩ
SQP 2W	2W	7	18	7	28±3	0.80	0.1Ω～50Ω	51Ω～33KΩ
SQP 3W	3W	8	22	8	32±3	0.80	0.1Ω～100Ω	101Ω～56KΩ
SQP 5W	5W	10	22	9	35±5	0.80	0.1Ω～150Ω	151Ω～100KΩ
SQP 7W	7W	10	35	9	35±5	0.80	0.1Ω～680Ω	681Ω～200KΩ
SQP 10W	10W	10.0	49	9.0	35±5	0.80	0.1Ω～910Ω	911Ω～200KΩ
SQP 15W	15W	12.5	49	11.5	35±5	0.80	1Ω～1KΩ	1Ω～1KΩ
SQP 20W	20W	14.5	60	13.5	35±5	0.80	1Ω～1.2KΩ	1Ω～1.2KΩ
SQP 25W	25W	14.5	64	13.5	35±5	0.80	1Ω～1.2KΩ	1Ω～1.2KΩ

立式導線型SQM

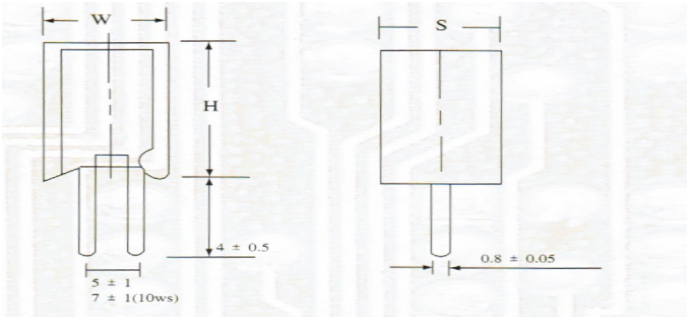

Unit:mm

Style 型號	Power rating at 70℃ 額定功率	BODY			Resistance range	Power Film
		W±1	L±1	D±1	阻值範圍	
SQM 2W	2W	20	11	7	0.1Ω～50Ω	51Ω～33KΩ
SQM 3W	3W	25	15	8	0.1Ω～100Ω	101Ω～56KΩ
SQM 5W	5W	25	13	9	0.1Ω～50Ω	151Ω～100KΩ
SQM 7W	7W	39	13	9	0.1Ω～680Ω	681Ω～200KΩ
SQM 10W	10W	51	13	9	0.1Ω～910Ω	911Ω～200KΩ
SQM 10WS	10W	35	16	13	0.1Ω～910Ω	911Ω～200KΩ

ELECTRICAL CHARACTERISTICS 電器特性

溫度係數	< 200Ω ±400PPM/℃	≥20Ω ±350PPM/℃
短時間過負荷	± (5%+0.05Ω)	
耐焊接熱	± (1%+0.05Ω)	
溫度循環	± (2%+0.05Ω)	
恒定濕熱	± (5%+0.05Ω)	
負載壽命	±5% < 100KΩ , ±5% ≥100KΩ , ±10%	