



Specification 规格说明




Rotting	额定电压,电流	DC 30V 0.3A,DC 50V 0.3A,DC 50V 0.5A,DC 60V 0.5A
Contact Resistance	接触电阻	30m ohm max.
Insulation Resistance	绝缘电阻	100M ohm at 500V DC
Withstand Voltage	耐电压	AC 500V for 1min
Switching Life	动作寿命	10.000 to 100.000 cycles(Unloading at 15-18 cycles per minute)

All information is for reference only.Particulars of any item are based on individual specfications.

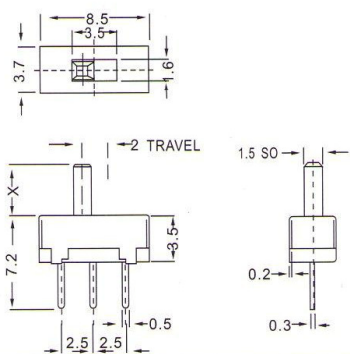




Part No.	SS-12D01
Circuit	1P 2T
Rating	DC 50V 0.3A
Timing	Non-Shorting
Knob Length	G 2-12

Circuit

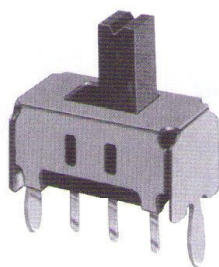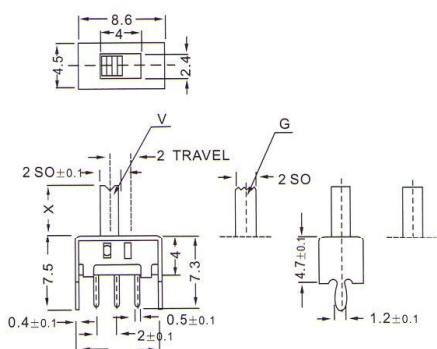



Part No.	SS-12D02
Circuit	1P 2T
Rating	DC 50V 0.3A
Timing	S Shorting N Non-shorting
Knob Length	VG 2 - 9

Circuit

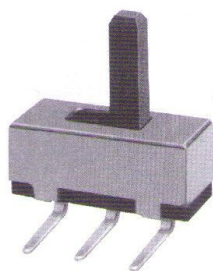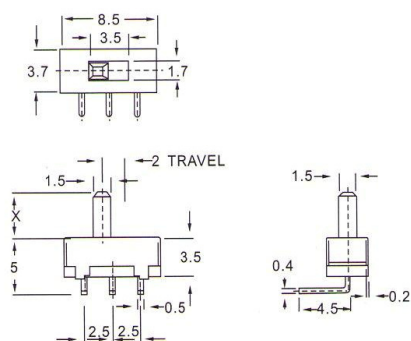

Part No.	SS-12D03
Circuit	1P 2T
Rating	DC 50V 0.3A
Timing	Non-shorting
Knob Length	G 2-12

Circuit

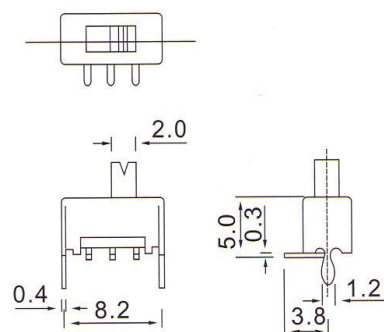

Part No.	SS-12D04
Circuit	1P 2T
Rating	DC 30V 0.3A
Timing	S Shorting N Non-shorting
Knob Length	VG 2 - 9

Circuit

